



PHILIPS HID Electronic Outdoor
Electronic Ballast for CPO

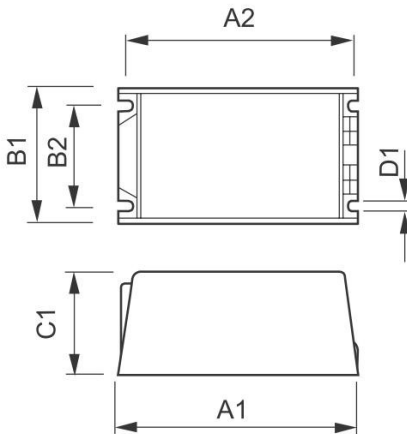

	A1	A2	B1	B2	C1	D1
HID PV Xt 45/S	135	125.7	65	46.8	65	4.8
HID PV Xt 60/S	135	125.7	65	46.8	65	4.8
HID PV Xt 90/S	150	140.7	65	46.8	65	5
HID PV Xt 140/S	150	140.7	65	46.8	65	5

	(W)	(Hz)	(V)	T-case maximum (°C)	Ignition Voltage (kv)	Cable-Cap outputwires mutual (pF)
HID PV Xt 45/S	45	50/60	220-240	80	2.9	1000
HID PV Xt 60/S	60	50/60	220-240	80	5	1000
HID PV Xt 90/S	90	50/60	220-240	80	5	1000
HID PV Xt 140/S	140	50/60	220-240	80	5	1000

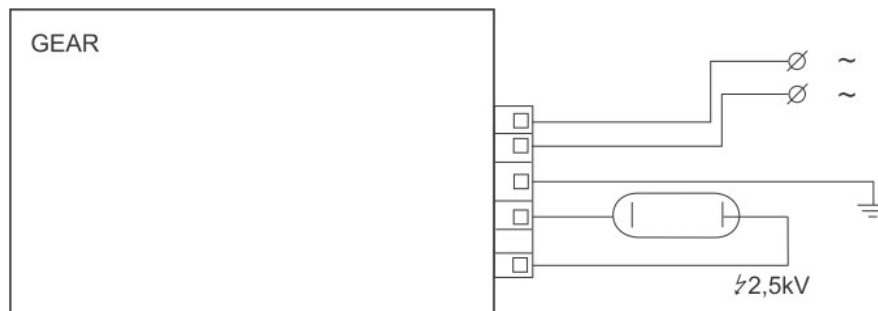

凡球照明股份有限公司

台北縣三重市光復路二段 80 號 9 樓之 7

TEL: 02-85123888 FAX: 02-85123439

<http://www.circleworld.biz>

Email: john@circleworld.com.tw